

*Fig. 1*

FIG. 2 is a perspective view of the device 10 in a second position, where the device 10 is in a retracted position. The device 10 includes a handle 12, a shaft 14, a sleeve 16, a collar 18, a stop 20, a spring 22, a plunger 24, and a tip 26. The handle 12 is connected to the shaft 14, which is connected to the sleeve 16. The sleeve 16 is connected to the collar 18, which is connected to the stop 20. The stop 20 is connected to the spring 22, which is connected to the plunger 24. The plunger 24 is connected to the tip 26. The device 10 is shown in a retracted position, where the tip 26 is not extended from the sleeve 16.

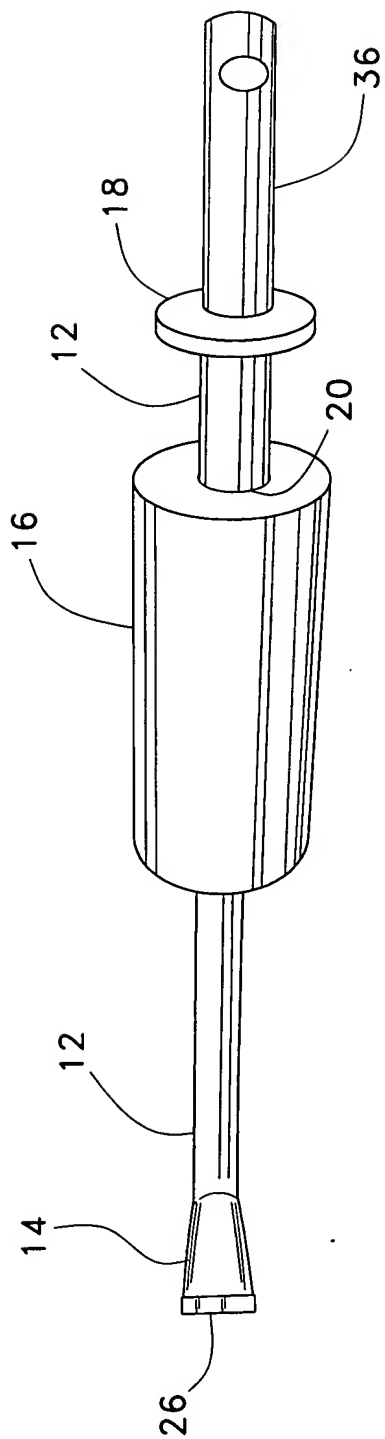


Fig. 2

FIG. 3A is a perspective view of a first embodiment of a device 10. The device 10 includes a main body 12 and a handle 14. The handle 14 is connected to the main body 12 and includes a grip 16. The device 10 is configured to be used for a specific purpose.

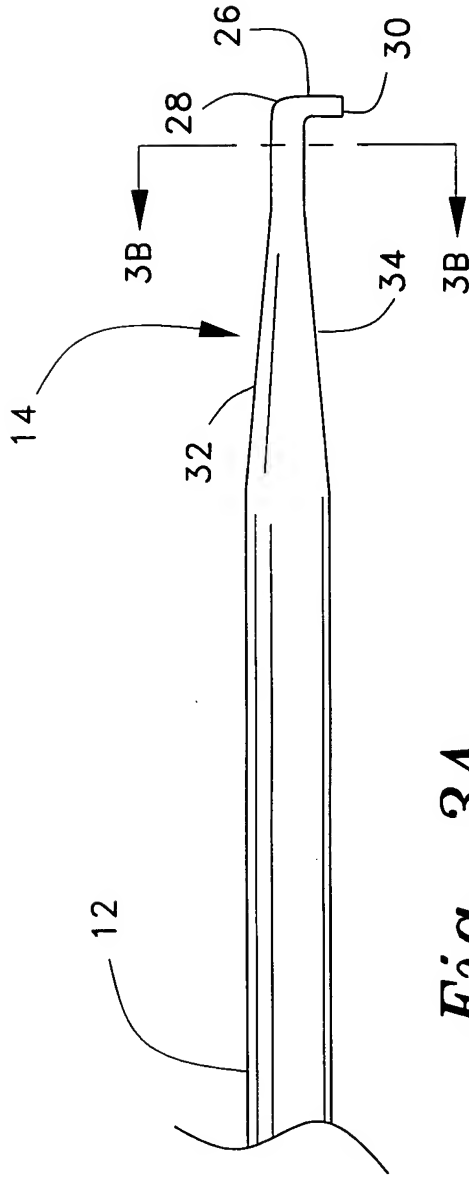


Fig. 3A




Fig. 3B

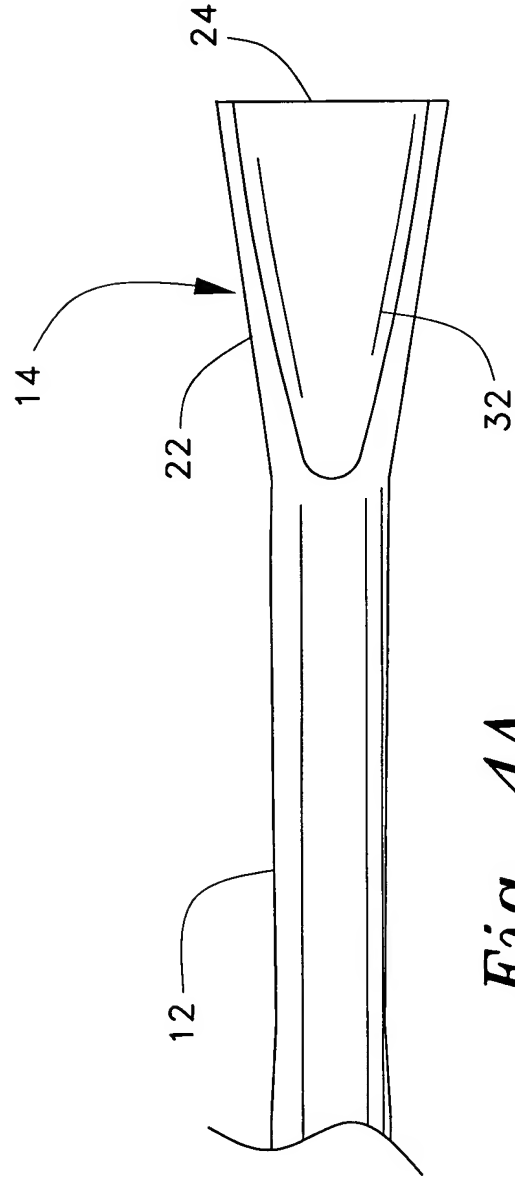


Fig. 4A




Fig. 4B

FIG. 5

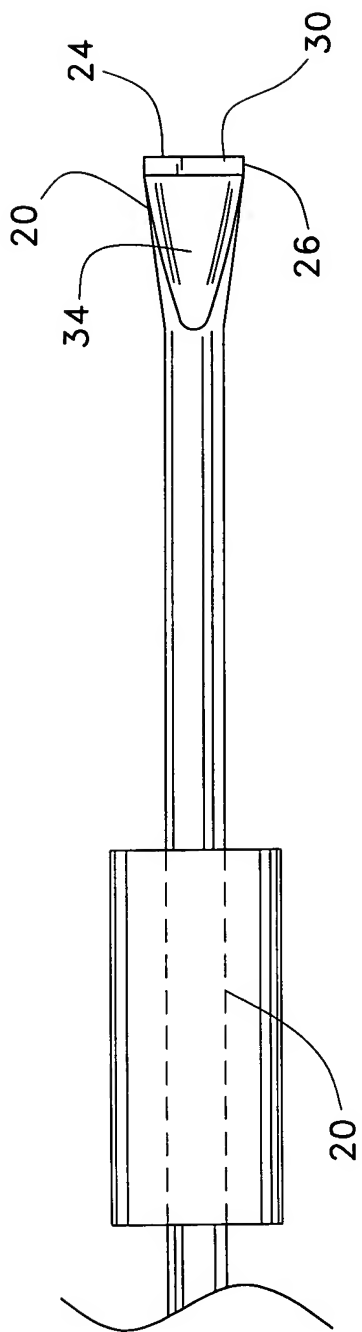


Fig. 5